



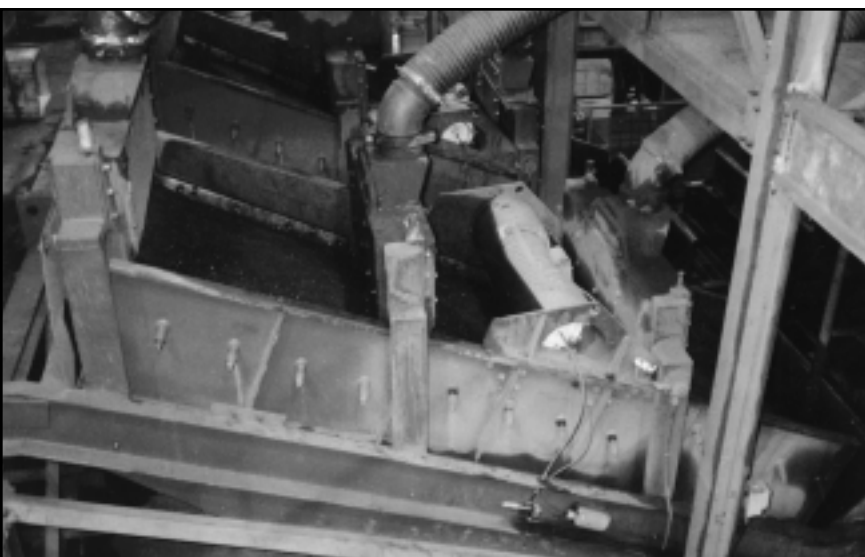

Autogenous Grinding Circuit IRON ORE

Two autogenous grinding mills, each handling 1,500-1,800 MTPH of new feed, are operated in closed circuit with ten (10) Derrick Model B60-144MS-3 Multifeed Screens using urethane screen panels with 2.0 mm openings. Size separation is made at 14 mesh. Screen panels have 42% open area and make separation with overall efficiencies ranging from 88% to 95%. Screen panels last 3 to 6 months. Grinding mills are operating without trommels.

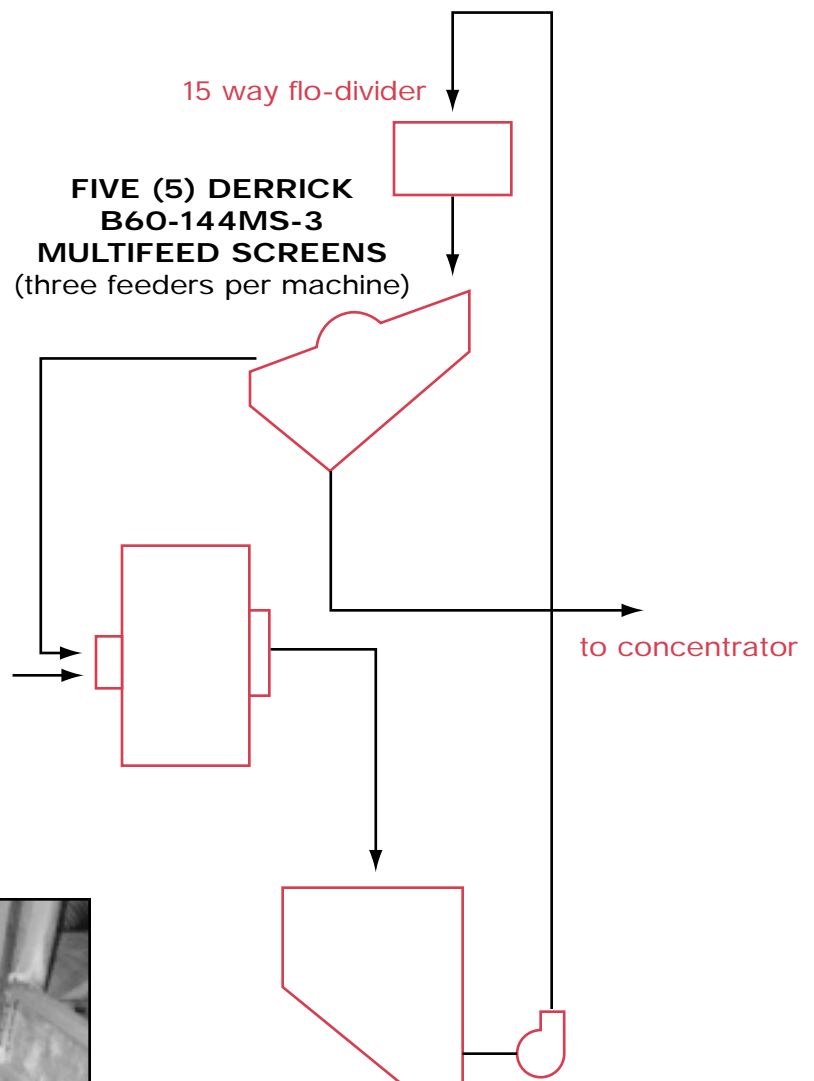

Serving all our customers worldwide:
www.derrickcorp.com

590 Duke Road • Buffalo, New York 14225
Phone: (716) 683-9010 • Fax: (716) 683-4991

FR106

© 1999/2000 Derrick Corporation
All products indicated by trademark symbols are
trademarked and/or registered by Derrick Corporation.